

## P8804 Indoor 360° Ceiling Antenna



### Description

The P8804 Indoor 360° Ceiling Antenna is an active omnidirectional antenna designed for optimal signal reception, featuring a built-in amplifier and LED status indicator for reliable indoor performance.

### Features

- 360° omnidirectional coverage for consistent indoor reception.
- Wide RF frequency range from 500 to 950 MHz.
- Built-in active amplifier for enhanced signal strength.
- Integrated amplifier ensures stable signal performance.
- LED indicator provides real-time operating status.
- BNC connector for easy and secure coaxial cable connection.
- Compact ceiling-mount design for unobtrusive installation.


### Specifications

Model	P8804
RF Frequency Range	500–950 MHz
Impedance	50 Ω (Typical)
Gain	18 dB
Maximum Radiation Angle	0–360°
Display	LED indicator

Power Supply  
Connector Type

+8 V  
BNC

## Product Information

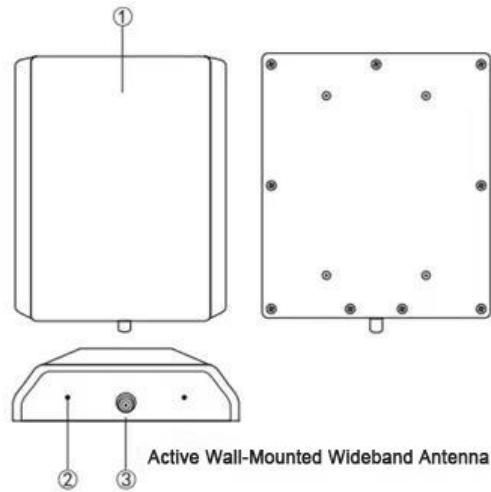

① Active Antenna Amplifier Module: Amplifies the received signal. ② RF Indicator Light: Shows the antenna operating status. ③ BNC Connector: Connects the antenna using a coaxial cable.